



SOLLEVATORI PNEUMATICI PNEUMATIC JACKS



	Mod.	
	YAK 1123	YAK 1123/C
	•	•
	•	•
	•	•
	•	•
	•	•
	•	•
	•	•
	•	•

Sollevatori pneumatici costituiti da una membrana ad alta resistenza e da una guida telescopica interna. Sono dotati di un dispositivo d'arresto a fine corsa e di una valvola di sicurezza che li rendono assolutamente affidabili in caso di carichi eccessivi. Silenziosi, semplici e leggeri, rappresentano il prodotto ideale per gommisti e carrozzieri in funzione della possibilità di utilizzo anche sui ponti sollevatori. Disponibile inoltre la versione carrellata. **Discesa automatica. Doppia valvola di tenuta.**



Pneumatically controlled jacks consisting of a highly resistant diaphragm and internal telescopic guide. These jacks are fitted with a limit stop device as well as a safety valve making them absolutely reliable in the case of excessive loads. Silent, simple and lightweight, they are ideal for tyre repairers and bodywork shops in view of the fact they can also be used on column lifts. Also available in the trolley version.

Automatic lowering. Double valve system.

YAK 1123

YAK 1123/C

NEW - HIGH CAPACITY

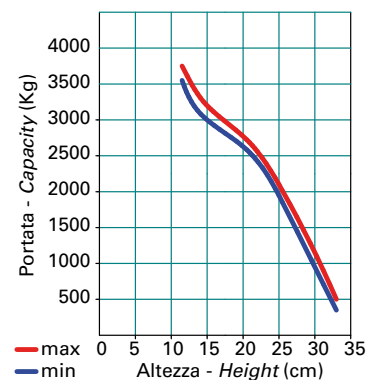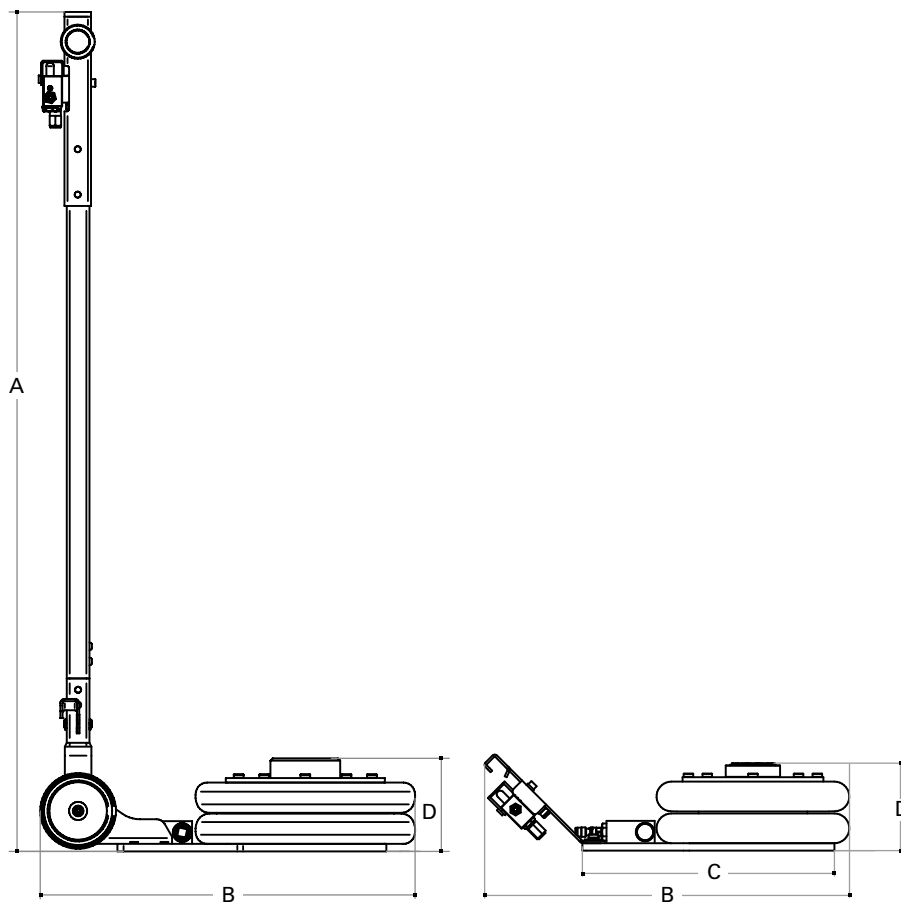

	YAK 1123	YAK 1123/C
Portata Capacity	3,0 t <i>3.3 ton</i>	3,0 t <i>3.3 ton</i>
Peso netto Net weight	18 kg <i>40 lb</i>	21 kg <i>46 lb</i>
Pressione di alimentazione Working air pressure	8 bar <i>116 psi</i>	8 bar <i>116 psi</i>
A	-	1109 mm <i>43.66 in</i>
B	492 mm <i>19.37 in</i>	492 mm <i>19.37 in</i>
C	340 mm <i>13.38 in</i>	250 mm <i>9.84 in</i>
D	112-340 mm <i>4.41-13.39 in</i>	112-340 mm <i>4.41-13.39 in</i>